

## Filtermist Oil Mist Collectors S Series (Oil Mist Filter)

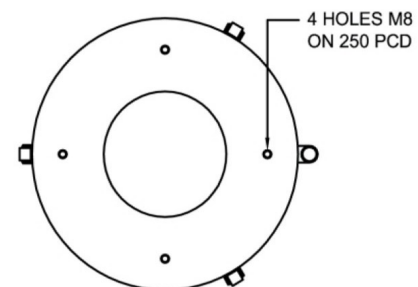
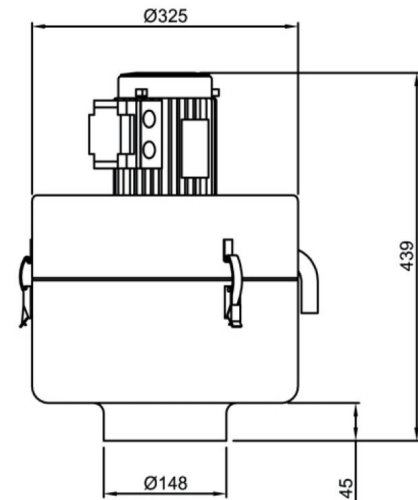
### MODEL S800





| S800 Specifications |   |
|---------------------|---|
| Airflow             | 550 CFM   |
| Motor               | .66 kW, 3 Phase, 50/60 Hz<br>208V<br>230V<br>460V<br>575V |
| Weight              | 16 Kg.  |
| Noise Level         | 67 dBA  |
| Inlet Diameter      | 6"  |

| S800 Mounting Options |                         |
|-----------------------|-------------------------|
| Direct Mount          | Hardware included       |
| Floor Stand           | specify height required |
| Wall Mount            | use BACS26 Bracket      |
| Machine Side Mount    | use BACS26 Bracket      |
| Suspended             | N/A                     |

- Used primarily on small enclosed CNC Machines
- Designed for direct mounting on the top of machine for hassle free installation
- Can also be mounted on a stand or mounting bracket.
- Unit comes complete with collar seal, mounting hardware and oil return hose



# Model S800

| Description   |  | Part No.            |
|---|--|---------------------|
|  | <p><b>S800 Filtermist Unit</b><br/>Complete with all mounting hardware for direct mounting.<br/>Motor – 230/460/3/60</p> | <b>S800 230/460</b> |
|  | <p><b>S800 Filtermist Unit</b><br/>Complete with all mounting hardware for direct mounting.<br/>Motor – 575/3/60</p>     | <b>S800 575</b>     |
| Stainless Steel Models available upon request                                     |  |                     |

## S800 Accessories

| Description   |   | Part No.  |
|---|---|---|
|    | <p><b>Afterfilter</b><br/>Collects dry smoke.</p>   | <b>2300AFA</b>  |
|    | <p><b>S Fusion Afterfilter</b><br/>For neat oil or high pressure</p>  | <b>S Fusion</b>   |
|   | <p><b>Mounting Stand</b><br/>Used to mount unit next to machine. Specify height.</p>                              | <b>Stand - specify height</b>   |
|  | <p><b>Oil Return Hose</b><br/>Returns oil to machine<br/>Sold by the foot.</p>                                    | <b>BACD11</b>   |
|  | <p><b>Flexible Ducting</b><br/>Oil resistant hose with wire reinforcement. 4", 6", 8" dia.</p>                    | <p>4" Dia. <b>BACD14</b><br/>6" Dia. <b>BACD16</b><br/>8" Dia. <b>BACD18</b></p>                                |
|  | <p><b>Hose Clamps</b><br/>Used to connect flexible hose to accessories.</p>                                       | <p>4" Dia. <b>BACC14</b><br/>6" Dia. <b>BACC16</b><br/>8" Dia. <b>BACC18</b></p>                                |
|  | <p><b>Y Adaptors</b><br/>For multiple collection points.<br/>Available in:<br/>4"x4"x4", 6"x4"x4" or 8"x6"x6"</p> | <p>4"x4"x4" <b>BACY44</b><br/>6"x4"x4" <b>BACY64</b><br/>8"x6"x6" <b>BACY86</b><br/>Other sizes on request.</p> |
|  | <p><b>Flanged Apaptors</b><br/>To secure ducting to a machine.<br/>Available in 4", 6", 8" diameters.</p>         | <p>4" Dia. <b>BACA14</b><br/>6" Dia. <b>BACA16</b><br/>8" Dia. <b>BACA18</b></p>                                |
|  | <p><b>Fishtails</b><br/>For collection on open machines.<br/>4", 6", 8" diameters.</p>                            | <p>4" Dia. <b>BACH14</b><br/>6" Dia. <b>BACH16</b><br/>8" Dia. <b>BACH18</b></p>                                |