

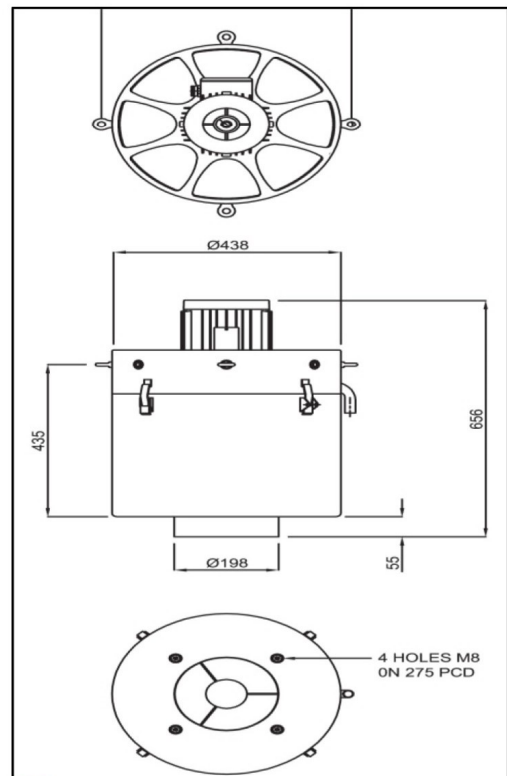
MODEL FX6002





FX6002 Specifications	
Airflow	1400 CFM
Motor	2.2 kW, 3 Phase, 50/60 Hz
	208V
	230V
	460V
Weight	575V
	34 Kg.
Noise Level	73 dBA
Inlet Diameter	8"

FX6002 Mounting Options	
Direct Mount	use 5000DMK Direct Mounting Kit
Floor Stand	specify height required
Wall Mount	use BACS66 Bracket
Machine Side Mount	use BACS66 Bracket
Suspended	use BACS20 Suspension Kit

- Used on open machines and larger CNC Machines
- Designed for mounting on a stand next to the machine where top of machine installation is not possible
- Can also be mounted directly on top of machines or on a mounting bracket
- Y Junction can be used where more than one intake point is required



Model FX6002

Description		Part No.
	FX6002 FiltermistXcel Unit Motor – 230/460/3/60	FX6002 230/460
	FX6002 FiltermistXcel Unit Motor – 575/3/60	FX6002 575
Stainless Steel Models available upon request		

FX5002 Accessories

Description		Part No.								
	Afterfilter Collects dry smoke.	7000AFA								
	Direct Mounting Kit Includes foam collar, mounting studs and hardware.	5000DMK								
	Mounting Bracket Used to mount unit on side of machine or on a wall.	BACS66								
	Mounting Stand Used to mount unit next to machine. Specify height.	Stand - specify height								
	Oil Return Hose Returns oil to machine. Sold by the foot.	BACD11								
	Flexible Ducting Oil resistant hose with wire reinforcement. 4", 6", 8" dia.	<table border="1"> <tr> <td>4" Dia.</td> <td>BACD14</td> </tr> <tr> <td>6" Dia.</td> <td>BACD16</td> </tr> <tr> <td>8" Dia.</td> <td>BACD18</td> </tr> </table>	4" Dia.	BACD14	6" Dia.	BACD16	8" Dia.	BACD18		
4" Dia.	BACD14									
6" Dia.	BACD16									
8" Dia.	BACD18									
	Hose Clamps Used to connect flexible hose to accessories.	<table border="1"> <tr> <td>4" Dia.</td> <td>BACC14</td> </tr> <tr> <td>6" Dia.</td> <td>BACC16</td> </tr> <tr> <td>8" Dia.</td> <td>BACC18</td> </tr> </table>	4" Dia.	BACC14	6" Dia.	BACC16	8" Dia.	BACC18		
4" Dia.	BACC14									
6" Dia.	BACC16									
8" Dia.	BACC18									
	Y Adaptors For multiple collection points. Available in: 4"x4"x4", 6"x4"x4" or 8"x6"x6".	<table border="1"> <tr> <td>4"x4"x4"</td> <td>BACY44</td> </tr> <tr> <td>6"x4"x4"</td> <td>BACY64</td> </tr> <tr> <td>8"x6"x6"</td> <td>BACY86</td> </tr> <tr> <td colspan="2">Other sizes on request.</td> </tr> </table>	4"x4"x4"	BACY44	6"x4"x4"	BACY64	8"x6"x6"	BACY86	Other sizes on request.	
4"x4"x4"	BACY44									
6"x4"x4"	BACY64									
8"x6"x6"	BACY86									
Other sizes on request.										
	Flanged Adaptors To secure ducting to a machine. Available in 4", 6", 8" diameters.	<table border="1"> <tr> <td>4" Dia.</td> <td>BACA14</td> </tr> <tr> <td>6" Dia.</td> <td>BACA16</td> </tr> <tr> <td>8" Dia.</td> <td>BACA18</td> </tr> </table>	4" Dia.	BACA14	6" Dia.	BACA16	8" Dia.	BACA18		
4" Dia.	BACA14									
6" Dia.	BACA16									
8" Dia.	BACA18									
	Fishtails For collection on open machines. 4", 6", 8" diameters.	<table border="1"> <tr> <td>4" Dia.</td> <td>BACH14</td> </tr> <tr> <td>6" Dia.</td> <td>BACH16</td> </tr> <tr> <td>8" Dia.</td> <td>BACH18</td> </tr> </table>	4" Dia.	BACH14	6" Dia.	BACH16	8" Dia.	BACH18		
4" Dia.	BACH14									
6" Dia.	BACH16									
8" Dia.	BACH18									

